



System Performance

Technical support for Andor products at LOT-QuantumDesign:
Christian Iser, phone: +49/6151/8806-690 and Frank Reiser, phone: +49/6151/8806-753,
e-mail: andorservice@lot-qd.de

ANDOR
an Oxford Instruments company

Please contact: Christian Iser, phone: +49/6151/8806-690, e-mail: iser@lot-qd.de
Frank Reiser, phone: +49/6151/8806-753, e-mail: reiser@lot-qd.de

LOT-QuantumDesign GmbH. Im Tiefen See 58. D-64293 Darmstadt. ☎ +49 6151 8806 0. ✉ info@lot-qd.de. www.lot-qd.com/ccd

LOT
Quantum Design

System Overview

Description	Model	Serial Number
CCD Head <input type="checkbox"/>	D U 9 40P - BV	CCD-21492
TE Cooler performance (<input type="checkbox"/>)		High <input type="checkbox"/> Ultra-high <input checked="" type="checkbox"/>
Accessories	Power Supply Unit PS -24	PS -25 <input checked="" type="checkbox"/>
	SO- LM- MFL-	
Serial/Batch Number		
Other		

Sensor types are defined in Table 1 using the last two letters in box Model Number.

CCD Details

Manufacturer / Model No.	Pixels	Serial Number
E2V CCD207-10	1600x400, 16 μ m x 16 μ m	
E2V CCD207-00	1600x200, 16 μ m x 16 μ m	
E2V CCD42-10	2048x512, 13.5 μ m x 13.5 μ m	14441-04-15
E2V CCD30-11	1024x256, 26 μ m x 26 μ m	

Special Feature	(<input type="checkbox"/>)	(<input type="checkbox"/>)
NIMO		Other (specify)
Fringe Suppression		Custom Cables
Shielded Anti-Blooming		

Window Variant	(<input type="checkbox"/>)	(<input type="checkbox"/>)
VUV-UV Parallel		NUV-Enhanced Parallel
Broadband VUV-NIR Wedged		Broadband VUV-NIR Parallel <input checked="" type="checkbox"/>
Broadband VIS-NIR Wedged		Broadband VIS-NIR Parallel
VIS-NIR Enhanced Wedged		Bose-Einstein 780nm Wedged
None		Other


System Sensitivity ¹

A/D Rate (MHz All 16 bit)	Preamp setting	High Sensitivity (HS) Output eles per A/D count	High Capacity (HC) Output eles per A/D count
3	x1	4.0	19.9
3	x2	2.1	9.4
3	x4	1.0	5.1
1.0	x1	4.2	19.5
1.0	x2	2.2	10.1
1.0	x4	1.0	5.1
0.05	x1	4.2	19.5
0.05	x2	2.2	10.2
0.05	x4	1.1	5.1

**Summary of System Test Data
Readout Noise ² and Base Mean Level**

A/D Rate (MHz All 16 bit)	Output Amplifier	Single Pixel Noise electrons	Full Vert Bin Noise electrons	Base Level ³ (Counts)
3	HS	11.1	11.2	2746
3	HC	8.1	7.9	891
1.0	HS	7.0	7.0	950
1.0	HC	5.6	5.4	685
0.05	HS	3.3	3.5	595
0.05	HC	2.0	2.0	584
Saturation Signal per pixel		97124		Electrons/pixel

CCD Dark Current

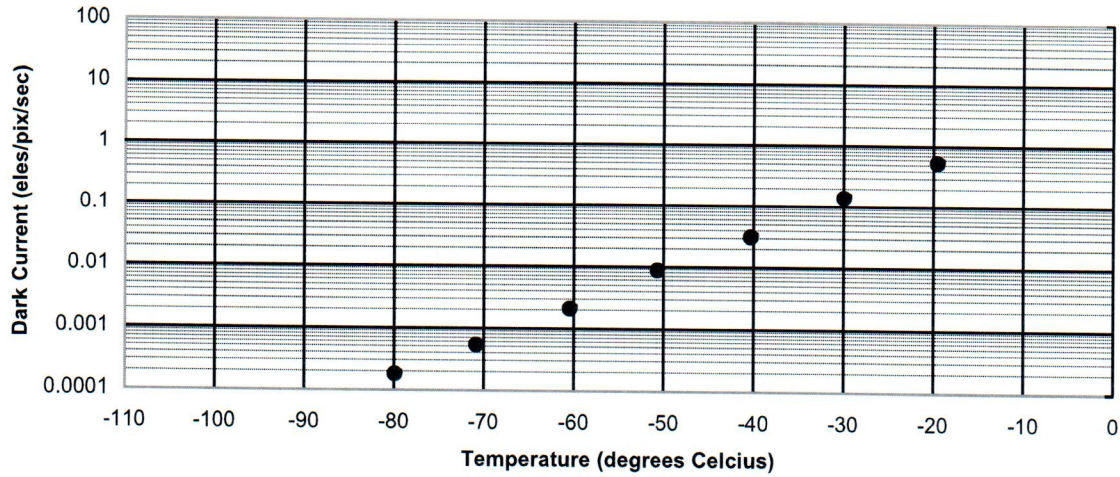

Minimum Dark Current Achievable ♦4	0.000099	electrons/pixel/sec		
@ Sensor Temperature of ♦5	-98.07	°C	16.0	°C cooling water
		With PS-25		
CCD Dark Current Uniformity better than ♦6	0.0024	electrons/pixel/sec		

Linearity and Uniformity

Linearity better than ♦7	1	% over 16 bits
Response Uniformity better than ♦8	1.63	%

Response Defects

White/Black Spots ♦9 (X, Y)			
Centroid	Number of Pixels	Centroid	Number of Pixels
(<input style="width: 30px;" type="text" value="X"/> , <input style="width: 30px;" type="text" value="X"/>)	<input style="width: 60px;" type="text" value="X"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
(<input style="width: 30px;" type="text" value="X"/> , <input style="width: 30px;" type="text" value="X"/>)	<input style="width: 60px;" type="text" value="X"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
White/Black Columns ♦10		Column numbers indicated	<input style="width: 30px;" type="text" value="X"/> <input style="width: 30px;" type="text" value="X"/> <input style="width: 30px;" type="text" value="X"/> <input style="width: 30px;" type="text" value="X"/>
Trap ♦11		(X, Y)	(<input style="width: 30px;" type="text" value="X"/> , <input style="width: 30px;" type="text" value="X"/>)

Dark Current Defects

Hot Spots ♦12 (X, Y)			
Centroid	Number of Pixels	Centroid	Number of Pixels
(<input style="width: 30px;" type="text" value="996"/> , <input style="width: 30px;" type="text" value="186"/>)	<input style="width: 60px;" type="text" value="1"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
(<input style="width: 30px;" type="text" value="X"/> , <input style="width: 30px;" type="text" value="X"/>)	<input style="width: 60px;" type="text" value="X"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>	(<input style="width: 30px;" type="text"/> , <input style="width: 30px;" type="text"/>)	<input style="width: 60px;" type="text"/>
Hot Columns ♦13		Column numbers indicated	<input style="width: 30px;" type="text" value="X"/> <input style="width: 30px;" type="text" value="X"/>

Test Conditions

Readout Noise tested at	-80	°C with	16	°C water
Base Mean Level measured at	-80	°C with	16	°C water
Dark Current Uniformity tested at	-50	°C with	16	°C water
Blemishes tested at	-50	°C with	16	°C water

Additional Comments

System Passed for Shipping

Signed

Date

P. SCOTT

12TH DECEMBER 2017

Hardware	System Configuration	FPGA
Version #	AE	20.24
Shipping Software	Solis	SDK
Version #	--	2.102.30034.0
Testing Software	Solis	SDK
Version #	4.30.30034.0	2.102.33034.0

▽ **Table 1; Key code to define the meanings of the last two letters in the Model Number**

Sensor Options			
OE	Open electrode	BU2	Back Illuminated (BI) + 250nm UV optimised
FI	Front illuminated (FI)	BU	BI + UV (350nm) optimised
UV	FI+UV coating	BV	BI + VIS (550nm) optimised
FO	FI + Fibre optic	BR-DD	BI + NIR +deepdepletion
FI-DD	FI + deep depletion	BN	BI with no AR coating

Performance Notes

- ◆1 Readout Noise is measured for both single pixel (SP) and fully vertically binned (FVB) with the CCD in darkness at temperature indicated and minimum exposure time. Noise values will change with pre-amplifier gain selection [PAG].
- ◆2 Average electronic DC offset for CCD in darkness at temperature indicated and minimum exposure time under dark conditions measured by single pixel (SP) for imaging systems and by (FVB) for spectroscopic systems.
- ◆3 Sensitivity is calculated in photoelectrons per A/D count from measurements of the Photon Transfer Curve.
- ◆4 Dark current falls exponentially with temperature. However, for a given temperature the actual dark current can vary by more than an order of magnitude from device to device. The devices are specified in terms of minimum dark current achievable rather than minimum temperature.
- ◆5 Minimum temperature achieved for thermoelectric (TE) cooler set to maximum value with water cooling
- ◆6 RMS (root mean square) deviation of dark current for fully binned operation for spectroscopic cameras, or full resolution image for imaging cameras, under dark conditions at temperature indicated (pixel/column defects not included). This variation is mainly cosmetic since it is fully subtractable without significant loss of performance.
- ◆7 Linearity is measured from a plot of Counts vs. Signal over the 16 bit dynamic range. Linearity is expressed as a %age deviation from a straight line fit. This quantity is not measured on individual systems.
- ◆8 RMS (root mean square) deviation from the average response of the CCD in fully binned operation for spectroscopic cameras illuminated with uniform white light (defects not included).
- ◆9 White/black pixels have signals >25% above/below the average (25% contrast) with uniform illumination across the sensor.
- ◆10 Columns whose signals have >10% contrast in binned operation with uniform illumination across the sensor for spectroscopic cameras.
- ◆11 Pixels which absorb charge as it is clocked through the defective area. When the light source is switched off, the signal from the trap appears to drop off more slowly than the signal from the surrounding pixels.
- ◆12 Hot spots are counted if they exhibit >50 times the maximum specified dark current at the test temperature indicated.
- ◆13 A column is considered defective if >10 pixels are affected, or if the column exhibits >2 times the maximum specified dark current at the test temperature indicated.